



## FULL COLOR INDOOR P6 LED Display

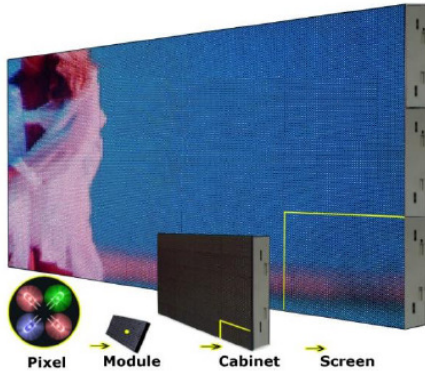

### Cabinets :

|   |                   |                 |              |
|---|-------------------|-----------------|--------------|
| 1 | Dimension (mm)    | L(mm): 768      | H(mm): 576   |
| 2 | Resolution (dots) | Horizon: 128    | Vertical: 96 |
| 3 | Weight (kg)       | 13 kg           |              |
| 4 | Material*****     | Aluminium Alloy |              |
| 5 | Power Consumption | 0.12 kW         |              |

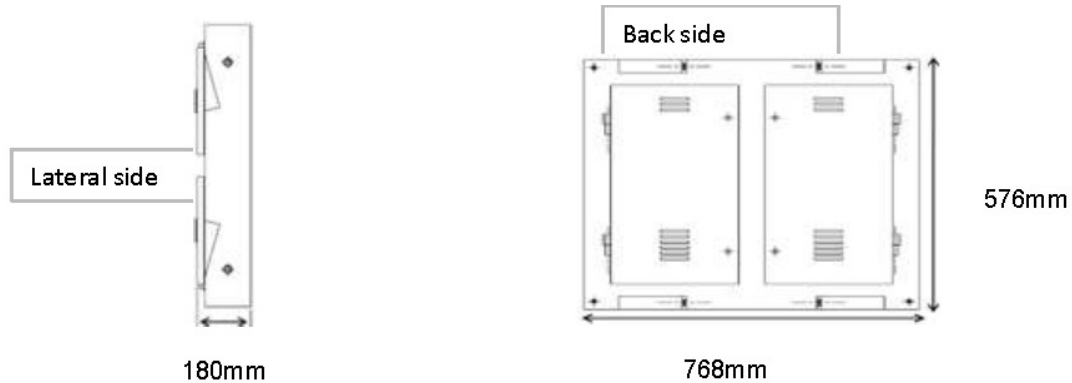

### Specifications :

**Brightness** : 2000 cd/m<sup>2</sup> (1 NIT = 1 cd/m<sup>2</sup>)  
**Brightness control** : Auto/manual Regulation  
**Gray Corrected** : Display ≥16.7M colors  
**Viewing Distance** : 4m ~ 100m  
**Resolution (dots) / cabinet** : 128 x 96 pixel  
**Max Consumption / cabinet** : 120 W  
**Operation Temperature** : -40°C ~ +80°C  
**Operation Humidity** : 10% ~ 95%  
**Ingress Protection** : IP 54 – non Waterproof  
**Power Supply** : 230 V/50 Hz CE Approval  
**Refresh Rate** : >400 Hz  
**Colors** : 16,7 millions  
**Weight** : 13 kg

## DISPLAY CONFIGURATIONS / PRICELIST

**4 : 3**

**189 pouces**

|    |    |    |    |    |
|----|----|----|----|----|
| 1  | 2  | 3  | 4  | 5  |
| 6  | 7  | 8  | 9  | 10 |
| 11 | 12 | 13 | 14 | 15 |
| 16 | 17 | 18 | 19 | 20 |
| 21 | 22 | 23 | 24 | 25 |

2.88 m

325 kg

3.84 m

11.06 m<sup>2</sup>

**4 : 3**

**151 pouces**

|    |    |    |    |
|----|----|----|----|
| 1  | 2  | 3  | 4  |
| 5  | 6  | 7  | 8  |
| 9  | 10 | 11 | 12 |
| 13 | 14 | 15 | 16 |

2.30 m

208 kg

3.07 m

7.08 m<sup>2</sup>

**15 : 9**

**176 pouces**

|    |    |    |    |    |
|----|----|----|----|----|
| 1  | 2  | 3  | 4  | 5  |
| 6  | 7  | 8  | 9  | 10 |
| 11 | 12 | 13 | 14 | 15 |
| 16 | 17 | 18 | 19 | 20 |

2.30 m

260 kg

3.84 m

8.85 m<sup>2</sup>

**16 : 9**

**139 pouces**

|   |    |    |    |
|---|----|----|----|
| 1 | 2  | 3  | 4  |
| 5 | 6  | 7  | 8  |
| 9 | 10 | 11 | 12 |

1.73 m

1.56 kg

3.07 m

5.21 m<sup>2</sup>

**4 : 3**

**113 pouces**

|   |   |   |
|---|---|---|
| 1 | 2 | 3 |
| 4 | 5 | 6 |
| 7 | 8 | 9 |

1.73 m

117 kg

2.30 m

3.98 m<sup>2</sup>

**BANDEAU**

|   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 |
|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|

325 kg

19.20 m


0.58 m

11.06 m<sup>2</sup>

# SYSCONCEPT

SysConcept Sàrl - Chemin de Biolet 10 - 2043 Boudevilliers / NE  
Tél. 0848 606 909 - Fax. 0848 616 919 - www.sysconcept.ch - info@sysconcept.ch

## DISPLAY PICTURES

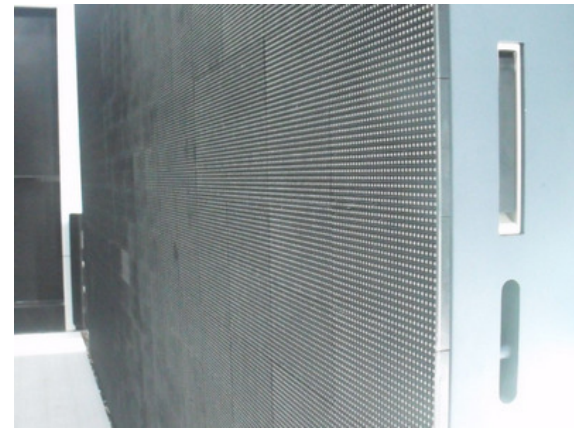

## LED PROCESSOR



### LedSync820B

Video Decoder Adjustments (NTSC, PAL) Brightness, Contrast, Hue, Saturation  
Adaptive 2/4-line Comb filter for Two Dimensional Chrominance/Luminance separation

State-of-the-art Motion-Adaptive Deinterlace Processor

Intelligent Edge Deinterlacing

Digital Color/Luminance Transient Improvement (DCTI/DLTI)

Advanced 4x4 Pixels Interpolation Scaling Algorithm

Independent H and V Scaling Ratios

10-bit Processing

3 Sets User-defined Gamma Value from 0.4 to 3.99

Advanced 4-symbol LUT for H and V Enlargement Scaler

Scaler Sharpness Control

User-defined Led Window Size and Location

1 of 8 Sources Directly Selected by Front Panel Button, Includes:

- 1 x DVI-D (1280x1024@60Hz, 1024x768@60Hz, 800x600@60Hz)
- 1 x VGA / RGBHV (1280x1024@60Hz, 1024x768@60Hz, 800x600@60Hz)
- 4 x CVBS (PAL / NTSC)
- 1 x Y/C S-Video (PAL / NTSC)
- 1 x YPbPr (HDTV 720p@60Hz , 1080i@60Hz)

RS 232 Control

Power 100-240VAC 50/60Hz 60W max

Humidity 15-85%

Operating Temp 5-40°

Size 58 mm ( high ) x425mm ( wide ) x275mm ( deep)

Weight 5.5 Kg

# SYS CONCEPT

SysConcept Sàrl - Chemin de Biolet 10 - 2043 Boudevilliers / NE  
Tél. 0848 606 909 - Fax. 0848 616 919 - www.sysconcept.ch - info@sysconcept.ch

